

DURA - FIRE HOSE REEL

SPECIFICATIONS

Recommended use	As per BCA (Building Code of Australia)
Nominal Hose Diameter	19mm
Hose Length	36m
Minimum discharge rate	0.45L/s at 220 ± 10kPa
Warranty (See below)	10 years
Standards	Manufactured to AS/NZS1221 and is fully serviceable. Fire hose reels must be maintained in accordance with AS1851 This hose reel is Tested & licensed to AS/NZS 1221 - SMKH21422



WARRANTY & CARE DETAILS

Warranty

You have purchased a quality product from Reece Australia. This product is covered by a 10 year warranty. This warranty covers faults in the product construction, material and assembly. Faulty products will be repaired or exchanged free of charge. Faulty items become our property.

This warranty does not include faults caused by

- Unsuitable or improper use
- Incorrect installation
- Installation or part installation by the purchaser or any person other than a LICENSED PLUMBER
- Normal wear and tear
- Inadequate or complete lack of maintenance
- Chemical, electrochemical or electrical influences.


To the maximum extent permitted by law, Reece excludes all warranties other than those set out above. In the event of a warranty claim, we will replace or repair defective products, or pay for the cost of having defective products repaired or replaced, but will not be liable for any injury to any person, damage to any property, any indirect or consequential loss, or in any other respect.

Disclaimer:

Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions and set-outs listed are correct at time of publication however the manufacturer distributor takes no responsibility for printing errors.



DURA - FIRE HOSE REEL

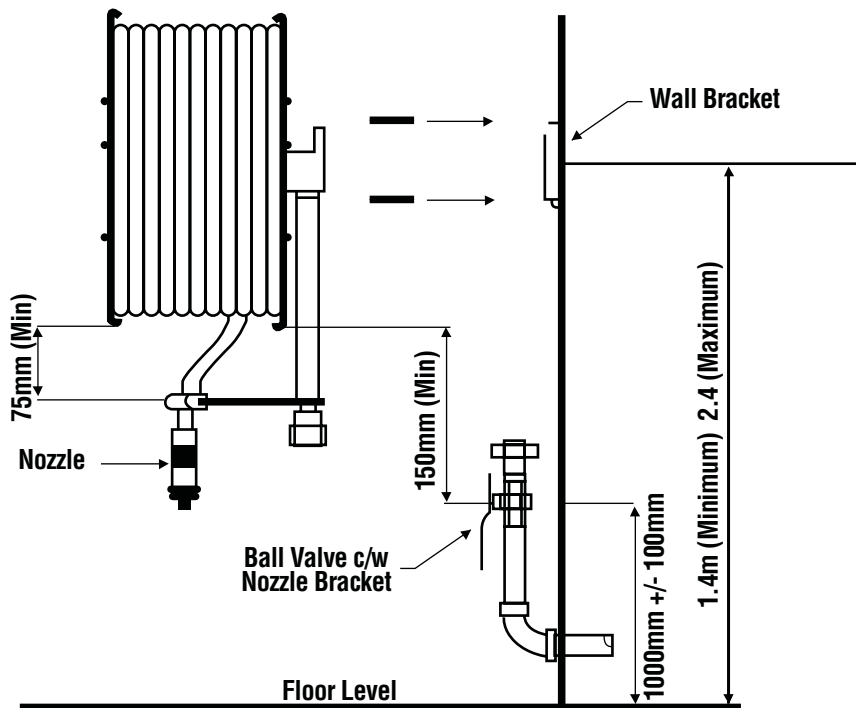

INSTALLATION INSTRUCTIONS

Step 1

To install hose reel on concrete or solid brick material use 4 only 4913047 BL set anchor 10 x 75mm.

To install hose reels on timber construction use 4 only 3203189 coach screw 10 x 75mm galvanised.

Centre line of bracket should be 1.4m-2.4m above floor level.

Step 2

Fit hose reel into wall bracket. Fit hose roller guide to 25mm inlet pipe, and fit union half to inlet pipe.

a) Where the hose guide is fitted to the hose reel supply pipe, it shall be located in a manner that will prohibit the guide moving vertically.

b) Where a hose reel is fixed in a cabinet or recess, the hose

guide shall protrude beyond the recess when the hose is run out.

Step 3

Fit valve/union assembly to incoming water supply line and assemble union with rubber sealing ring.

Step 4

The hose and nozzle must feed through the roller guide and be secured to the nozzle bracket at the stop valve.

Step 5

Carry out installation, pressure test and commissioning in accordance with AS2441.