


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.  
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Scala Bidet Mixer  
Product code: SBIDMC

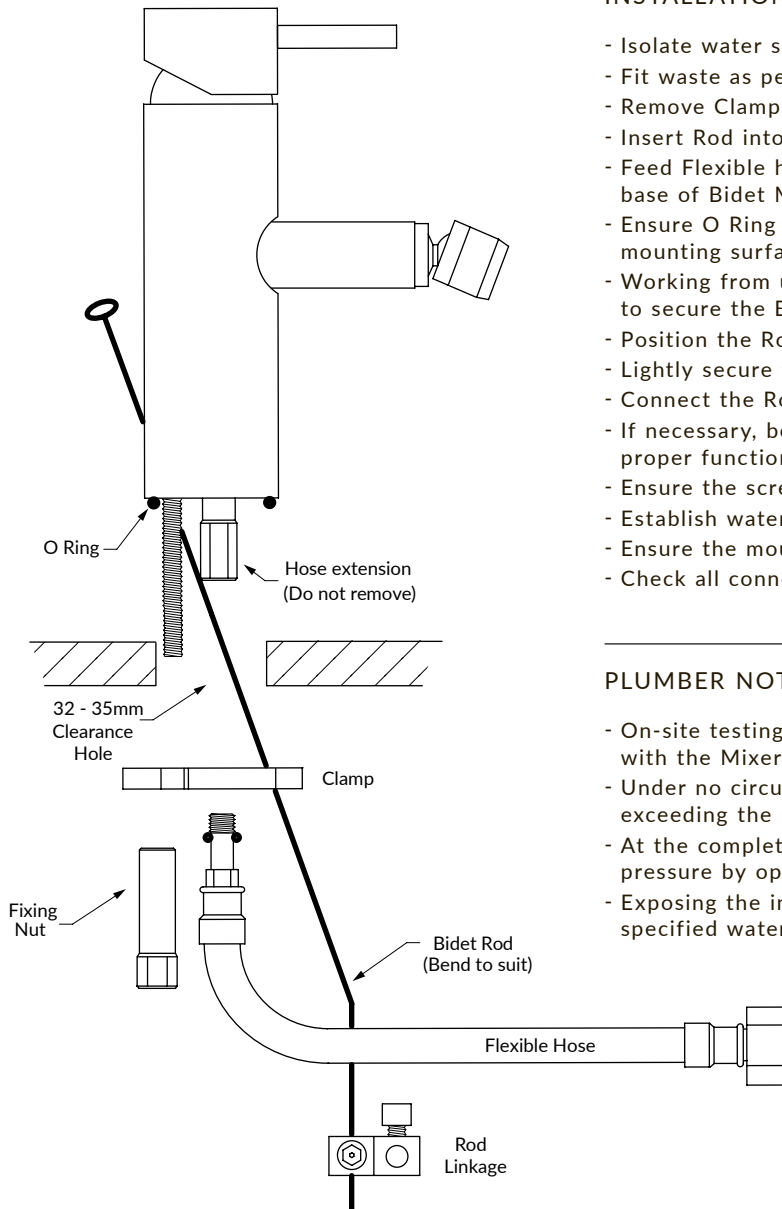

INSTALLATION GUIDELINES

- Isolate water supply.
- Fit waste as per "Pop Up" waste instructions.
- Remove Clamp and Fixing Nut from Bidet Mixer.
- Insert Rod into the Bidet Mixer as drawn.
- Feed Flexible hoses through the mounting surface and attach to base of Bidet Mixer.
- Ensure O Ring is intact and lower the Bidet Mixer onto the mounting surface.
- Working from underneath, fit Clamp and Fixing Nut, tighten well to secure the Bidet Mixer.
- Position the Rod Linkage onto the Bidet Rod.
- Lightly secure the Rod Linkage to the Bidet Rod.
- Connect the Rod from the "Pop Up" waste to Linkage.
- If necessary, bend the Bidet Rod to suit the installation, allowing proper function of the waste.
- Ensure the screws of the linkage are well tightened.
- Establish water supply and check the operation of the Bidet Mixer.
- Ensure the mounting surface of the Bidet Mixer is water-tight.
- Check all connections for water leaks.

PLUMBER NOTE

- On-site testing using higher water pressures must be conducted with the Mixer in the closed position. (STATIC TEST)
- Under no circumstances is the Mixer to be opened when exceeding the maximum stated water pressure.
- At the completion of testing, do not relieve any high water pressure by opening the Mixer.
- Exposing the internals of the Mixer Cartridge to higher than specified water pressures will void the manufacturers warranty.