


# KADO

## CLASSIC EXPOSED TELEPHONE SHOWER SET LEVER HANDLE

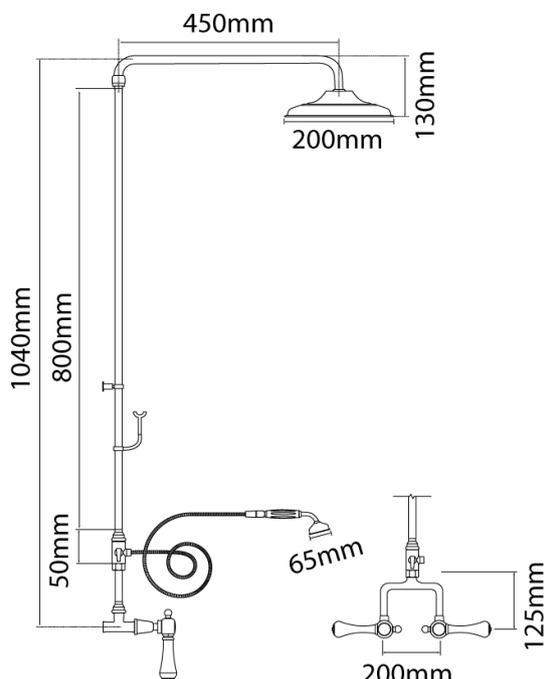

Dimensions are nominal measurements only.

### SPECIFICATIONS

<b>Recommended Use</b>	Domestic, hotel and commercial.
<b>Colour Availability</b>	Chrome, Brass Gold.
<b>Handle Options</b>	Cross Handle, Lever, Porcelain Lever.
<b>Pressure Rating</b>	As per AS/NZS3500 pressure must be limited to 500kPa on any new home, extension or renovation. For best performance and longer life we recommend 150-500kPa. Hot and cold water inlet pressure should be equal.
<b>Temperature Rating:</b>	80°C maximum continuous working temperature.
<b>Suitable Hot Water Units</b>	Storage Tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable



To see the complete KADO range go to [www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.



Disclaimer: Products in this specification manual must be installed by regulation by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1



# KADO

## CLASSIC EXPOSED TELEPHONE SHOWER SET LEVER HANDLE



**Chrome**



**Porcelain Chrome**



**Brass Gold**

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

# KADO

## CLASSIC EXPOSED TELEPHONE SHOWER SET LEVER HANDLE

### INSTALLATION INSTRUCTIONS


**IMPORTANT INFORMATION, please read before starting installation.**

1. This tapware may come partially assembled. This is for packaging purposes only.
2. It is the plumbers responsibility to ensure that all assembled components and threaded joints are checked for correct assembly prior to installing.
3. All threaded joints are to be taped with suitable plumbers tape or sealed with a recommended sealing compound.
4. Prior to installation, the tapware must be pressure tested using the appropriate testing equipment.
5. Prior to installation, the installer is responsible for ensuring installation of the correct plumbing fittings and the set out distances are correct for the product supplied.

**IMPORTANT INFORMATION: please read before starting installation. A Licensed Plumber must install this product.**

1. It is the plumber's responsibility to ensure that all assembled components and threaded joints are checked for correct assembly prior to installing.
2. All threaded joints are to be taped with suitable plumbers tape or sealed with a recommended sealing compound.
3. Prior to installation, the tapware must be pressure tested using the appropriate testing equipment.
4. Prior to installation, the installer is responsible for ensuring installation of the correct plumbing fittings and the set out distances are correct for the product supplied.

The following diagram is an installation guideline using an example of an exposed tapware for your installation reference. The product you have purchased may have similar but different configurations.

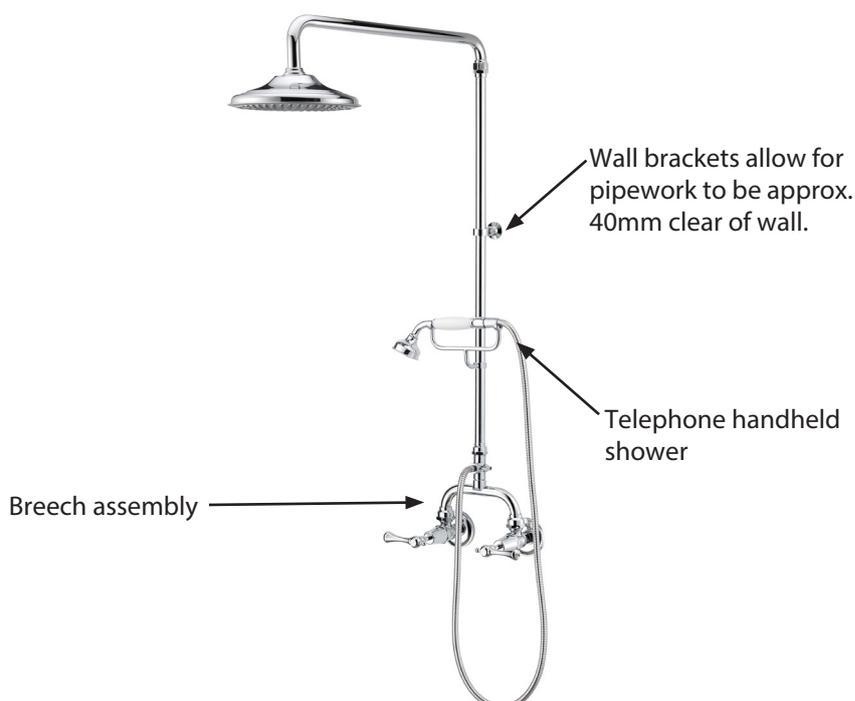

**Don't risk it, use a licensed plumber.™**