

MILLI GLANCE BASIN MIXER

INSTALLATION INSTRUCTIONS

Milli Glance Basin Mixer Installation Instruction

Water Supply Requirements

To ensure optimum performance and customer satisfaction please adhere to the following:

- Maximum hot water temperature 75°C.
- Recommended minimum working pressure 150kPa.
- Recommended maximum working pressure 500kPa.

If the water pressure exceeds or is likely to exceed 500kPa, an approved pressure limiting valve must be fitted.
 - Flush out all pipe work prior to installation.
 - If the water temperature exceeds 75°C an approved tempering valve must be fitted.
 - Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Failure to comply with the above may void all warranties. For details on Phoenix's warranty policy refer to www.phoenixtapware.com.au

Maintenance and Care

Do not use cleaning agents containing a corrosive acid or scouring agent. Do not use cream cleaners, as they are abrasive. Surfaces should only be cleaned with a cloth and clear water of mild liquid detergent. Use of unsuitable cleaning agents may damage the surface.

Guarantee

This product is guaranteed against faulty workmanship and materials for 1 year from the date of purchase. Installation must be done by a licensed plumber or this guarantee will be void.



Cartridge Replacement

- 1 : loosen Grub Screw with an allen key.
- 2 : Remove Mixer Handle and Dome.
- 3 : Loosen and remove Lock Nut with a tube spanner.
- 4 : Remove the old mixer cartridge and replace with a new unit, and make sure that O-rings are in places.

To re-assemble, follow above steps in reverse.

Installation Instruction

- 1 : Cut a mounting hole 35mm in diameter.
- 2 : Remove one of the hose assemblies from the mixer. Run Dress Plate over both Hose Assembly, as shown.
- 3 : Reattach the hose assembly to Mixer and fasten with a spanner.
- 4 : Screw the threaded stud into mixer base.
- 5 : Fit the rubber ring into Dress Plate groove.
- 6 : Position Mixer over the mounting hole. Feed the hoses through the mounting hole.
- 7 : From underneath the bench, fit "C" gasket and "C" washer over both hoses and the threaded stud.
- 8 : Screw on long nut and fasten firmly with a tube spanner to secure the mixer.
- 9 : Connect the water supply.
 Red-Marking Hose to hot water.
 Blue-Marking Hose to cold water.
- 10: Turn on the water supply and check for leaks.

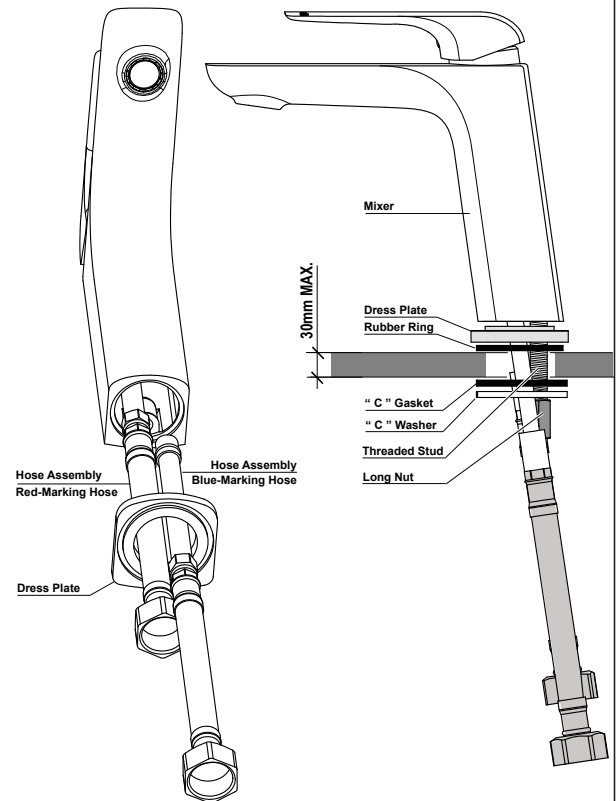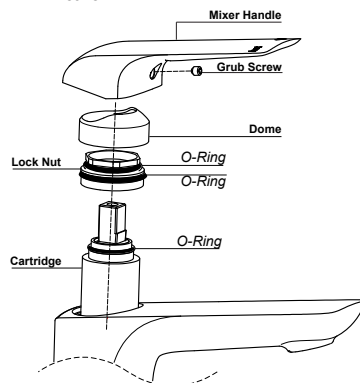

IN0129 revA