


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.  
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Scala Hob Sink/Spa Outlet

Product code:	Available options:	Reece code:
SHSIOC	Hob Sink Outlet Curved	2261609
SHSIOQC	Hob Sink Outlet Square	2261610
SHSOC	Hob Spa Outlet Curved	2261434
SHSOQC	Hob Spa Outlet Square	2261612

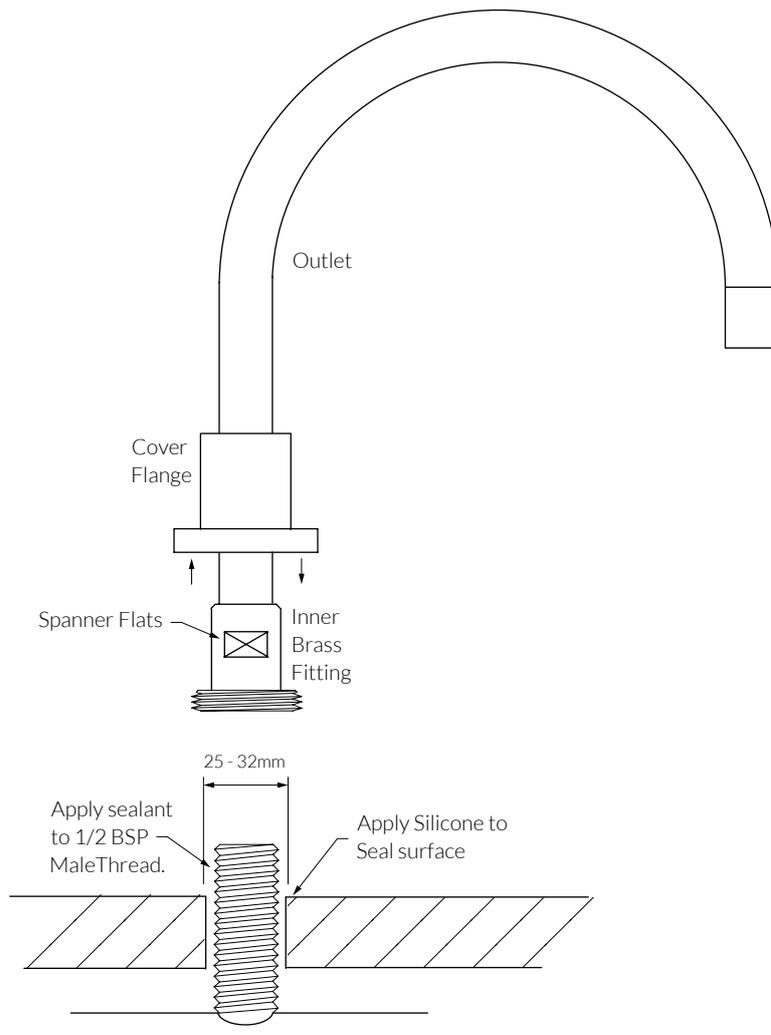

- A 1/2" BSP Male Thread is to protrude through the finished Hob surface by 10-20mm.
- Apply adequate thread sealant (Teflon Tape) to the protruding 1/2" BSP thread.
- Ensure the Finished Hob Surface is sealed using an appropriate Silicone.

PLUMBERS NOTE

- The Outlet is supplied assembled. No parts need to be removed.
- Unscrew and carefully raise the Cover Flange to expose the Inner Brass Fitting.
- Fit the Outlet to the male 1/2" BSP thread protruding through the Hob.
- The Inner Brass Flange swivels and has provisions for tightening (Spanner flats).
- Lower and thread the Cover Flange to the secured Inner Brass fitting.
- Once installed, check function of the Outlet and check for water leaks.