


# KADO

## CLASSIC WALL BASIN SET-LEVER HANDLE 150/200/250MM

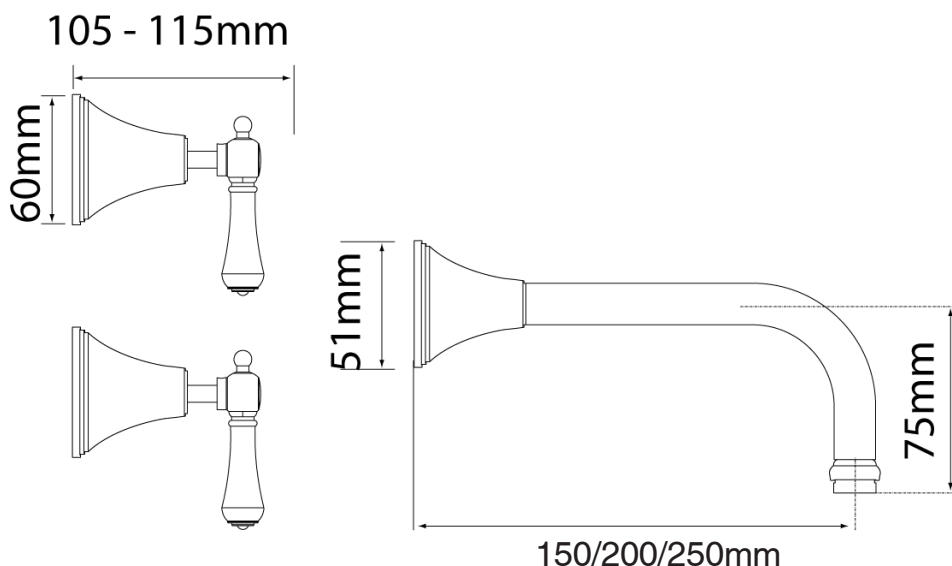

Dimensions are nominal measurements only.

### SPECIFICATIONS

<b>Recommended Use</b>	Domestic, hotel and commercial.
<b>Colour Availability</b>	Chrome, Brass Gold.
<b>Outlet Size Options</b>	150mm, 200mm, 250mm.
<b>Handle Options</b>	Cross Handle, Lever, Porcelain Lever.
<b>Pressure Rating</b>	As per AS/NZS3500 pressure must be limited to 500kPa on any new home, extension or renovation. For best performance and longer life we recommend 150-500kPa. Hot and cold water inlet pressure should be equal.
<b>Temperature Rating:</b>	80°C maximum continuous working temperature.
<b>Suitable Hot Water Units</b>	Storage Tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable



To see the complete KADO range go to [www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1



# KADO

## CLASSIC WALL BASIN SET - LEVER HANDLE

150/200/250MM



Chrome



Porcelain Chrome



Brass Gold



Porcelain Brass Gold

Don't risk it, use a licensed plumber.™

# KADO

## CLASSIC WALL BASIN SET - LEVER HANDLE 150/200/250MM

### INSTALLATION INSTRUCTIONS

**IMPORTANT INFORMATION, please read before starting installation.**

1. This tapware may come partially assembled. This is for packaging purposes only.
2. It is the plumbers responsibility to ensure that all assembled components and threaded joints are checked for correct assembly prior to installing.
3. All threaded joints are to be taped with suitable plumbers tape or sealed with a recommended sealing compound.
4. Prior to installation, the tapware must be pressure tested using the appropriate testing equipment.
5. Prior to installation, the installer is responsible for ensuring installation of the correct plumbing fittings and the set out distances are correct for the product supplied.

### FOR THE PLUMBER:

1. All work should be carried out by a licensed plumber. Responsibility will not be accepted for incorrect installation of this tapware, or any tapware not installed by a Registered Plumber.
2. The water supply lines need to be 'flushed out' prior to installation. This will avoid any foreign material blocking the flow regulator, damaging the cartridge/valve and reducing the flow of water.
3. Install the stuffing box assembly to the wall connection. Ensure it is connected to the correct water supply.
4. Ensure all connections are tight.
5. Turn on the main water supply and check for leaks.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference