


# Kado Lux Back to Wall Overheight Pan Quick Release Soft Close Seat White (4\*)


## INSTALLATION INSTRUCTIONS

**Note:** All measurements for roughing in should be taken from the finished wall/floor

### Fixing bracket & Water inlet

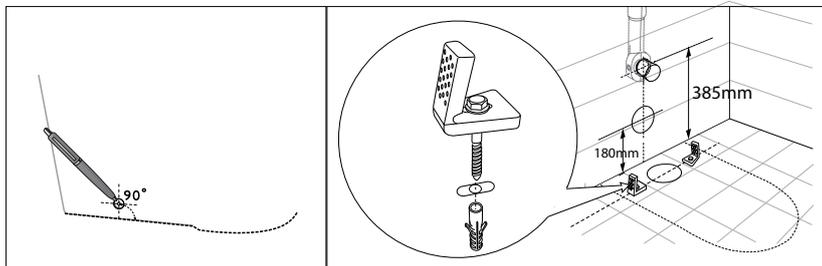


Position pan against wall and mark off pan fixing holes on floor.

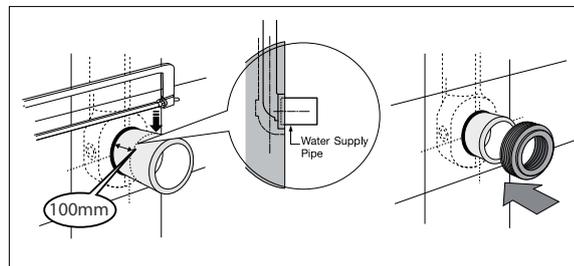


Water inlet pipe should be roughed in at 380mm. Cut inlet pipe so that 100mm protrudes from finished wall and attach seal.

### S-Trap Installation

**NOTE:** This is a set out of 95-110mm

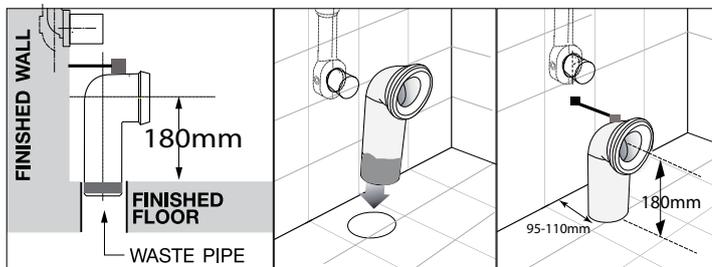


Insert waste pipe into floor at a setout of 95-110mm and 180mm above finished floor and fix bracket into position as per diagram above.

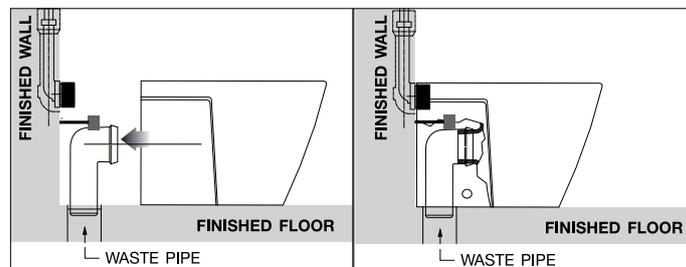


Push pan into position. Ensure that you make a firm connection with inlet and outlet pipes and avoid disturbing the floor fixing brackets. Flush test for leaks.

### P-Trap Installation

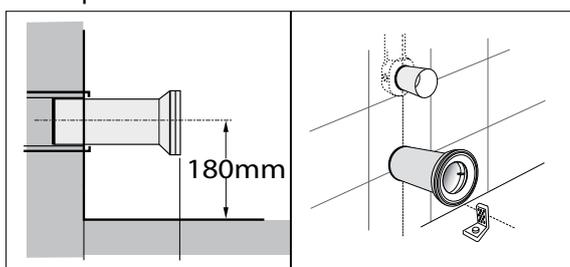


100mm DWV with pan collar (not supplied).

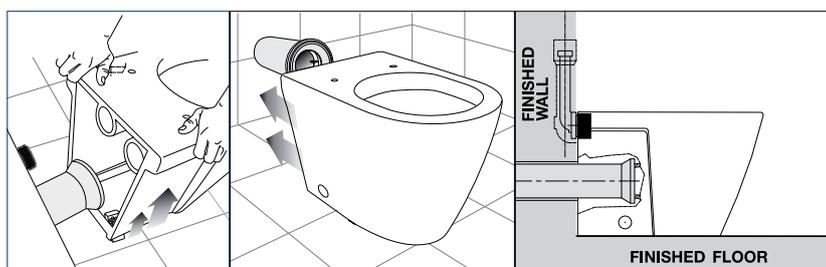

Push pan back into position. Ensure that you make a firm connection with inlet and outlet pipes and avoid disturbing the floor fixing brackets. Flush test for leaks.

### Fixing Pan to Floor

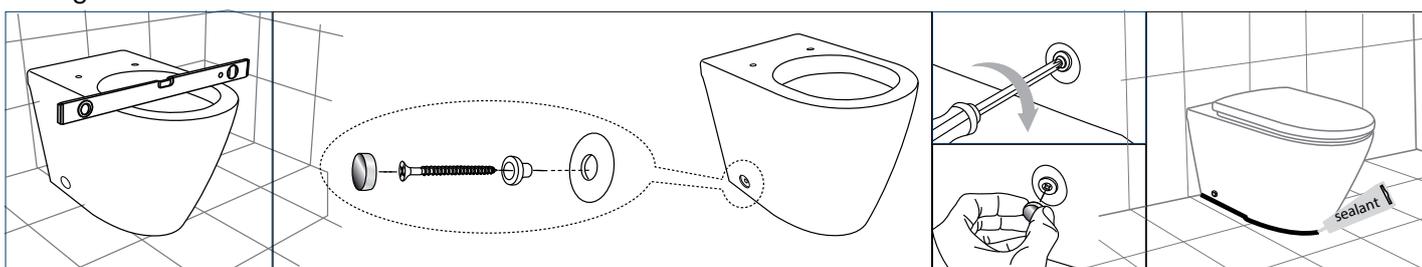

Ensure that pan is level. Fix pan to floor using fixing screws and flexible sealant. Install soft closing seat.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

KADO







reعه

# Kado Lux Back to Wall Overheight Pan Quick Release Soft Close Seat White (4\*)

## LUX SEAT INSTALLATION INSTRUCTIONS

### Important Note:

Soft close seat and covers can take up to 30 seconds to close. Do not force the closing mechanism as this may result in damage. The fixings of your seat may require re-tightening occasionally depending on use.

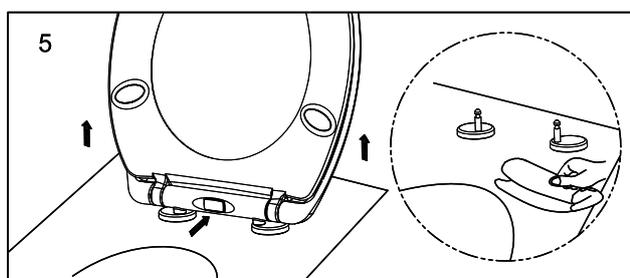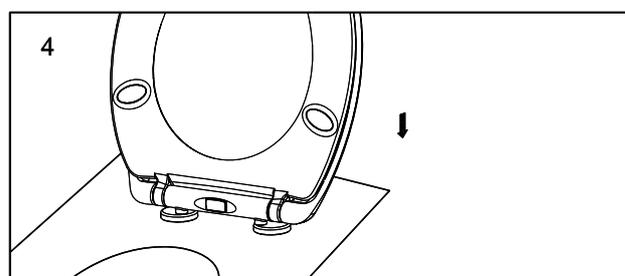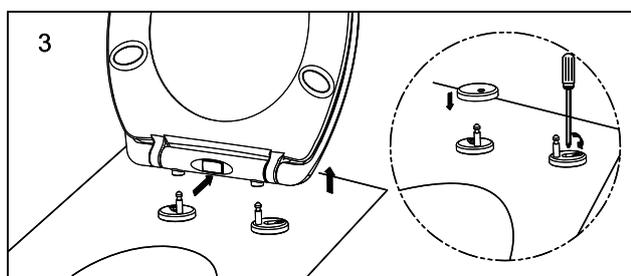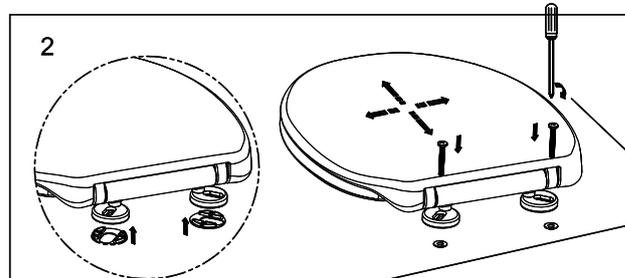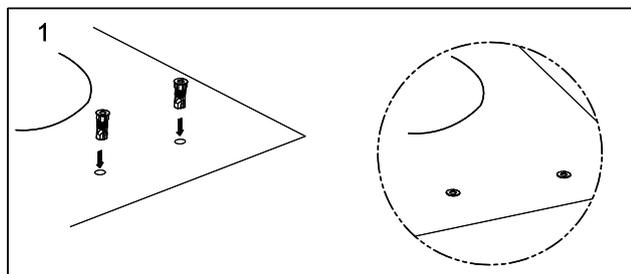

### Top Fixing Installation procedure.

1. Insert the nylon toggles into the hinge holes of the pan.
2. Mount the hinges onto the shaft of the toilet seat.
3. Plug the bolt into the nylon toggle.
4. Align the toilet seat with the pan.
5. Tighten the screws.
6. Push the button to release the seat.
7. Lift the toilet seat.
8. Insert hinge covers over posts.
9. Fix seat into final position.

## SPARE PARTS

Picture	Reece Code	Product Description
	<b>9506723</b>	KADO QUICK RELEASE SCS BUFFER SET
	<b>9503294</b>	TOP FIX QUICK RELEASE HINGE SET

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

KADO

reece