


ROCA

VICTORIA CLOSE COUPLED TOILET SUITE

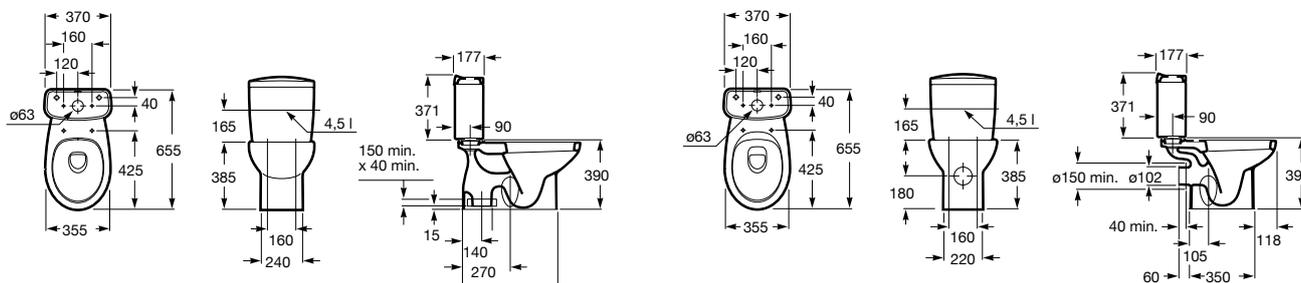

Dimensions are nominal only

SPECIFICATION

Rim Configuration	Box Rim
Bowl Configuration	Available in P and S Trap
Set Out	P Trap: 180mm, S Trap: 140mm
Pan Fixing	Screwed to the floor and bedded with sealant
Cistern Fixing	Bolted directly to bowl
Seat	Standard and soft-close matching seats available
Water Inlet	Bottom inlet, right hand side
Cistern	4.5/3 litre dual flush
Inlet Valve	Recommended max. working pressure 1000kPa
WELS	4 Star WELS Rating
Standards	AS1172.1 and AS 1172.2




To see the complete Roca range go to www.reece.com.au/bathrooms

FEATURES

Recommended Use	Domestic, hotel and commercial
Weight	S Trap pan: 20.4kg, P Trap pan: 17.8kg, Cistern: 12.6kg

CLEANING RECOMMENDATIONS

Soapy water or approved bathroom cleaners. This bathroom product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Page for full Terms and Conditions.

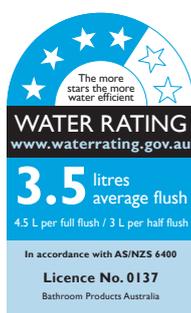

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.








Tech Page Version 1



ROCA VICTORIA CLOSE COUPLED TOILET SUITE

INSTALLATION


VICTORIA

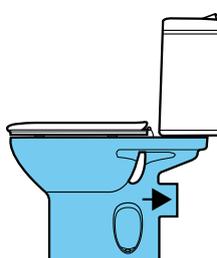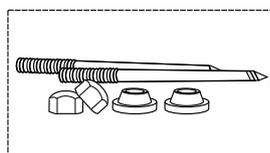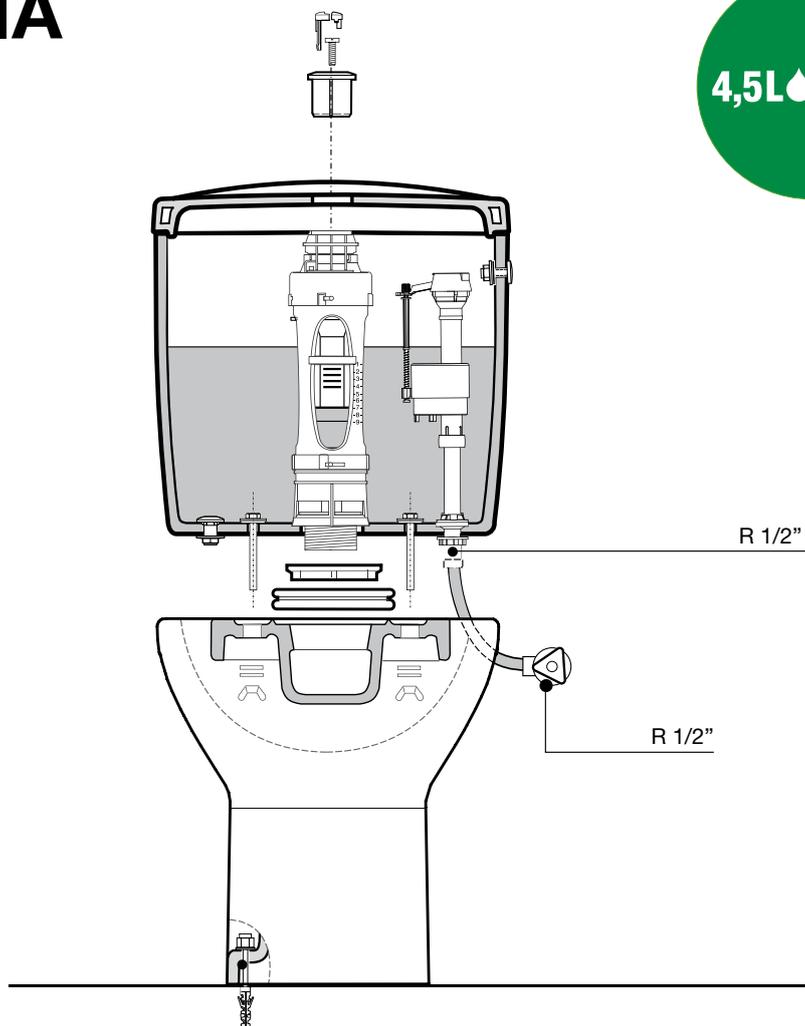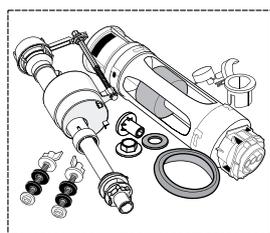

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

ROCA VICTORIA CLOSE COUPLED TOILET SUITE


INSTALLATION

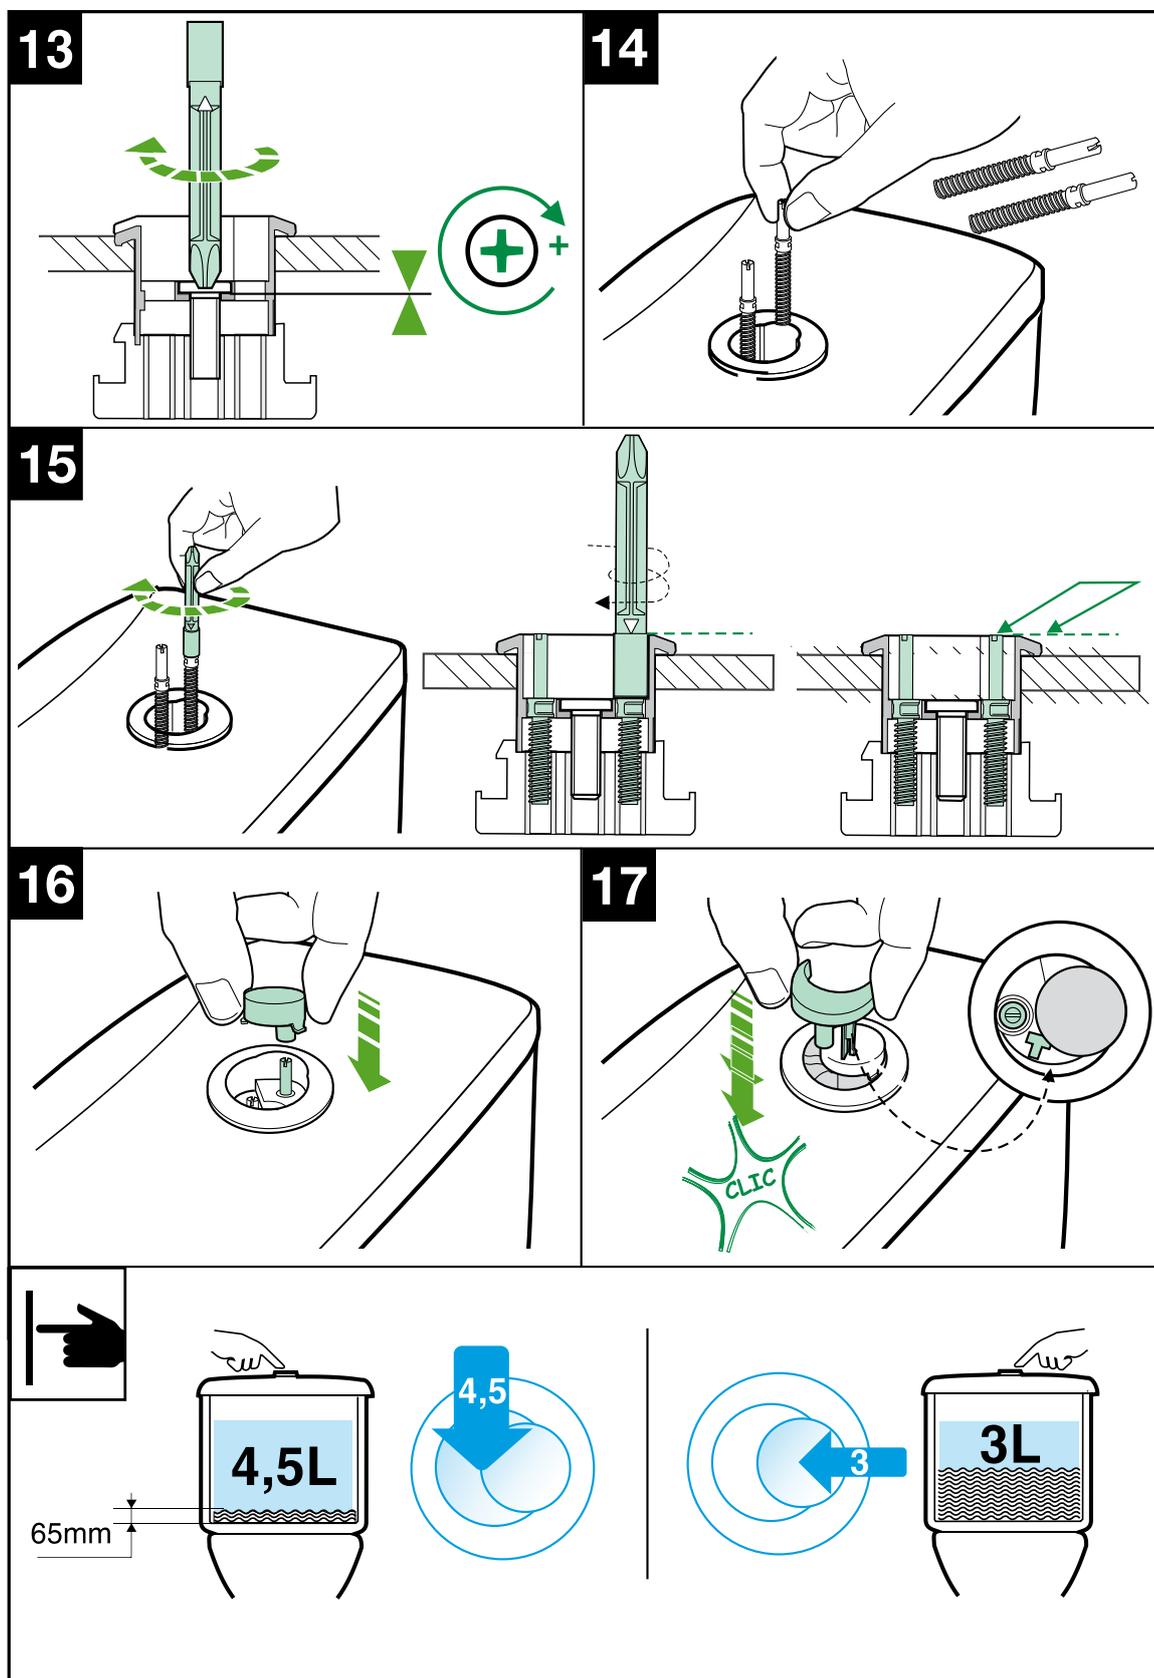

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

ROCA VICTORIA CLOSE COUPLED TOILET SUITE

MAINTENANCE

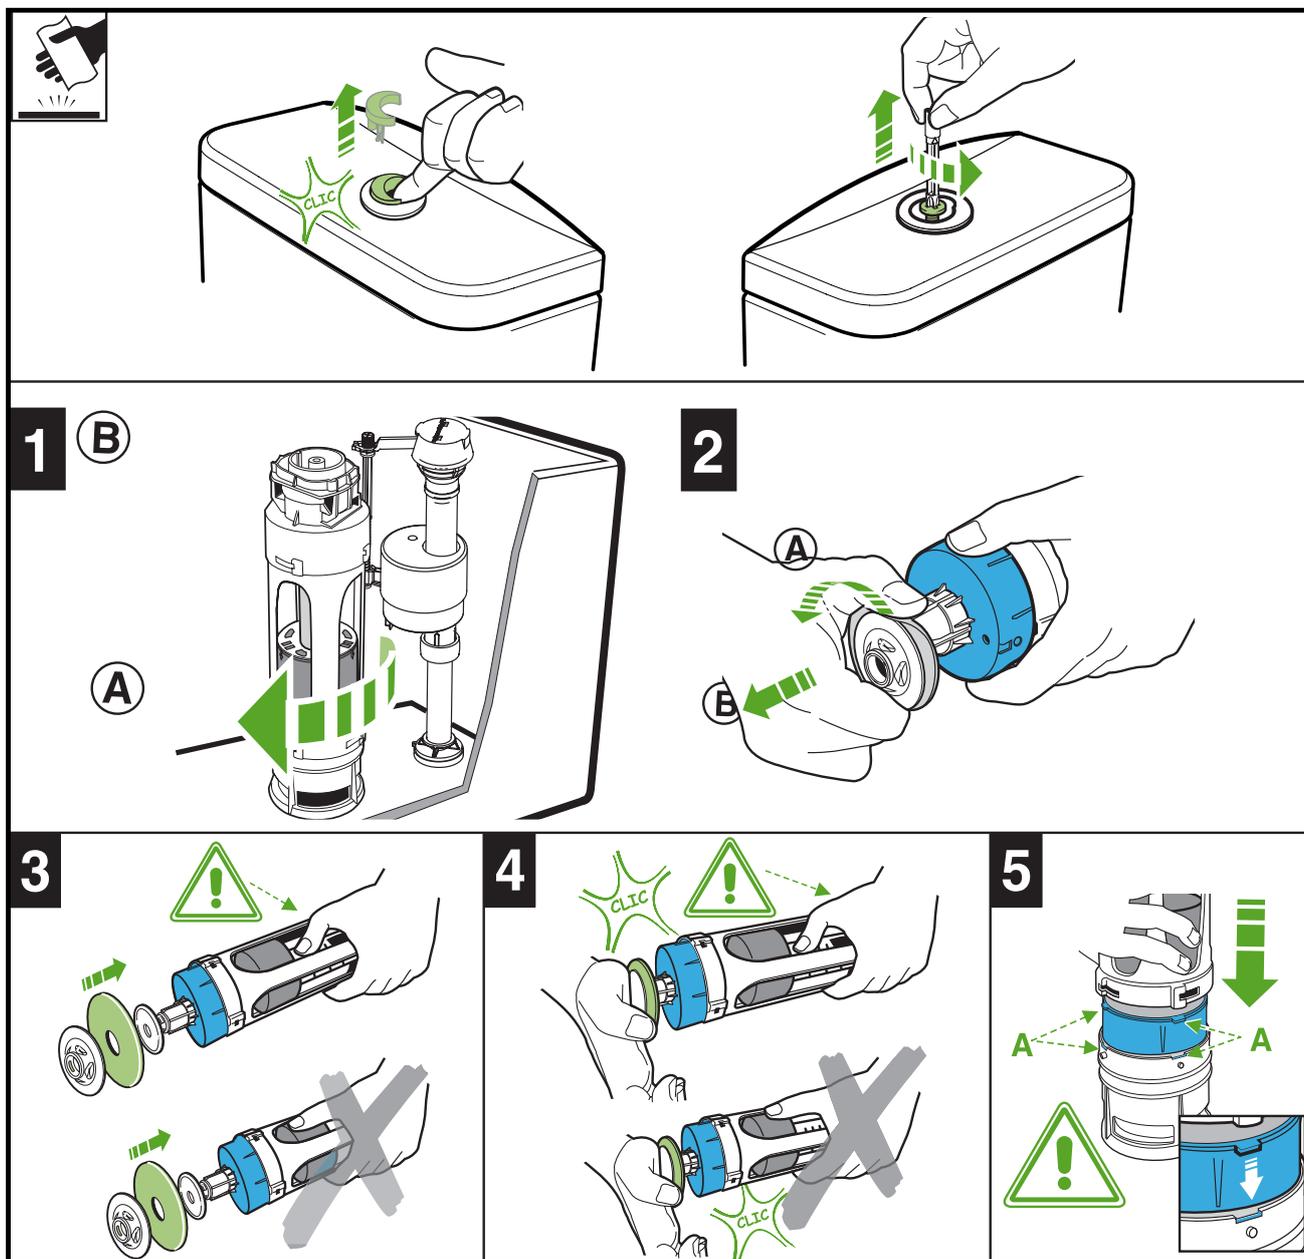

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference