

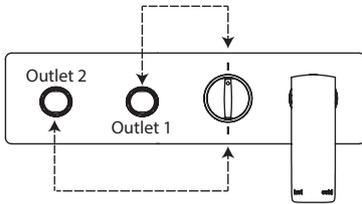
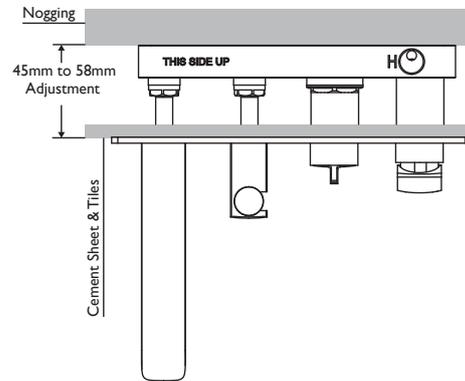
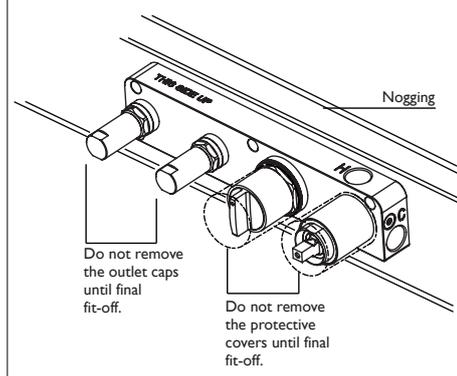
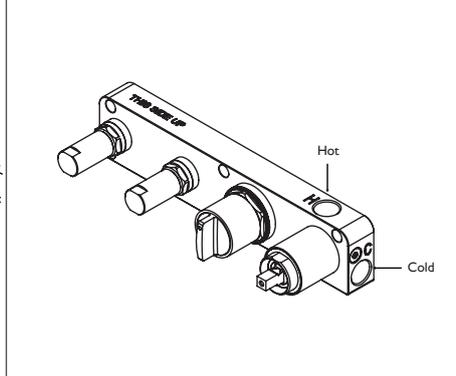
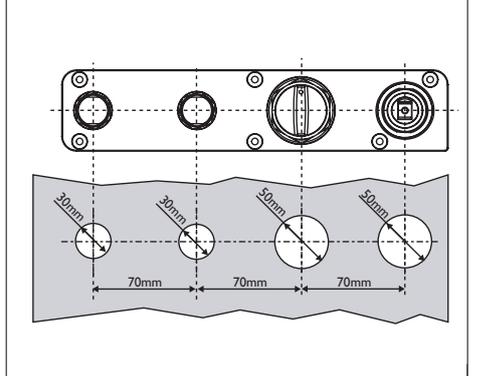
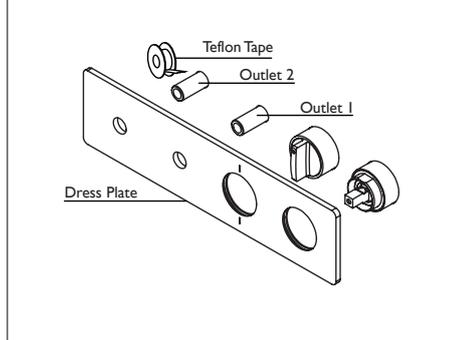


Milli Glance Wall Bath / Shower System (3 Star)

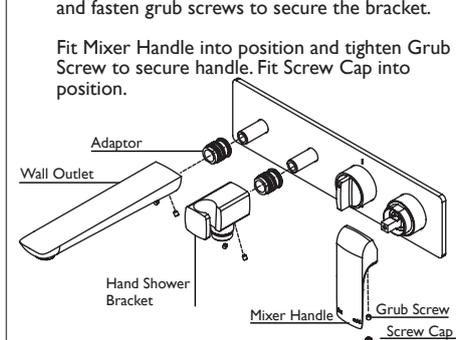

Both hand shower and bath outlet can be installed to either outlet 1 or outlet 2.

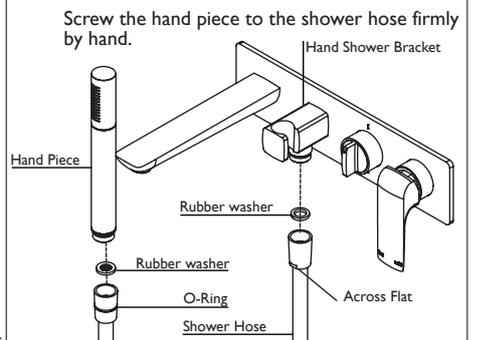

- | | | |
|--|---|--|
| <p>1 Screw the mixer breach onto Nogging. Ensure that the mixer breach is level.</p>  | <p>2 Connect hot and cold water supply, as shown.</p> <p>Test and check for leaks.</p>  | <p>3 Mark hole centre lines. Create two 30mm holes and two 50mm holes on the cement sheet and tiles, as shown.</p>  |
| <p>4 Remove the protective covers and the outlet caps. Apply Teflon tape to Outlet Threads. Gently push the dress plate into position.</p>  | <p>5 Screw adaptors to outlets with a spanner.</p> <p>Push Wall Outlet to appropriate adaptor and fasten grub screws to secure Wall Outlet. Push Hand Shower Bracket to the other adaptor and fasten grub screws to secure the bracket.</p> <p>Fit Mixer Handle into position and tighten Grub Screw to secure handle. Fit Screw Cap into position.</p>  | <p>6 Make sure that rubber washers are installed into position.</p> <p>Fasten the shower hose to the G1/2" thread on the bracket with a spanner.</p> <p>Screw the hand piece to the shower hose firmly by hand.</p>  |